Luxury Vinyl Tile Flooring

Grabo LVT specifications

Robust and Ideal are available in all Plank*it* designs with the minimum quantity of 2 paletts/design.

DESCRIPTION		PLANK*IT*	IDEAL	ROBUST
Construction		Luxury Vinyl Tile with iGuard Surface		
Plank size | wood	EN ISO 24342	185×1220 mm	185×1220 mm*	185×1220 mm*
	EN ISO 24342	158×950 mm*	158×950 mm*	158×950 mm*
Tile size | stone	EN ISO 24342	305×610 mm	305×610 mm*	305×610 mm*
Total thickness	EN ISO 24346	2,5 mm	2,7 mm	3,0 mm
Wear layer thickness	EN ISO 24340	0,55 mm	0,7 mm	1,0 mm
Total weight	EN ISO 23997	3,8 kg/m^2	3,9 kg/m^2	4,6 kg/m^2
CLASSIFICATION				
European classification	EN 685	class: 33/42	class: 34/43	class: 34/43
Binder content	EN ISO 10582	Type I.	Type I.	Type I.
PERFORMANCE				
Abrasion group	EN 660-1	T	T	T
Residual indention	EN ISO 24343	max. 0,1 mm	max. 0,1 mm	max. 0,1 mm
Dimensional stability	EN ISO 23999	≤ 0,15%	≤ 0,15%	≤ 0,15%
Requirement	EN ISO 23999	max. 0,25%	max. 0,25%	max. 0,25%
Curling	EN ISO 23999	max. 2,0 mm	max. 2,0 mm	max. 2,0 mm
Fire resistance	EN 13501-1	class: Bfl-s1	class: Bfl-s1	class: Bfl-s1
Slip resistance	EN 13893	class: DS	class: DS	class: DS
	DIN 51130	class: R10	class: R10	class: R10
Electrical properties	EN 1815	max. 2kV / Antistatic		
Chemical resistance	EN ISO 26987	✓	✓	✓
	ASTM F925	✓	✓	✓
Light fastness	EN 20105 B02	grade 6	grade 6	grade 6
Castor chair resistance	EN ISO 4918	✓	✓	✓
Surface treatment		iGuard PUR Surface / Easy cleaning		
Content of PCP	EN 12673	does not contain		
Formaldehide emission	ENV 717-1	E1 (no emission)		
VOC		pass	pass	pass
4 sides bevelling		Available	Available	Available
Warranty	Commercial	10 year	12 year	15 year
	Residential	15 year	17 year	20 year

*min. order quantity 2 paletts

GRABO LVT iGuard

2020101

GRABOPLAST
FLOOR COVERING MANUFACTURERS LTD.
H-9023 Győr, Fehérvári út. 16/b. Telefon: (+36) 96 506-100
www.graboplast.com
www.facebook.com/graboplast

TÜVRheinland CERT ISO 9001 ISO 14001

GRABO

LVT | Luxury Vinyl Tile Flooring

GRABO LVT
Luxury Vinyl Tile Flooring

GRABO LVT

GRABO LVT

Grabo LVT is a long lasting flooring solution due to its durability against impacts, stains and scratches thus it is a perfect choice for both residential and commercial applications.

Due to it's glass fibre reinforcement Grabo LVT is a ***dimensionally stable LVT flooring*** with sound insulating properties and warm underfoot feeling.

Our product has iGuard surface coating with low maintenance requirement.

Its flexibility provides economic, easy and quick installation.

GRABO LVT PRODUCTS ARE:

- PLANK*IT*
- IDEAL
- ROBUST

ECOLOGICAL FORMULA

The Grabo LVT floorings are inspired by nature, manufactured with ***phthalate free*** technology and provides an environmentally friendly flooring solution for the users.

PHTHALATE FREE TECHNOLOGY · ECOLOGICAL FORMULA

NO WASTE PRODUCTION · ECOLOGICAL FORMULA

100 % RECYCLABLE · ECOLOGICAL FORMULA

MADE IN EUROPE

GRABO LVT

WOOD DESIGNS

PLANK SIZE
185×1220
mm

QTTY/BOX
~2.7 m²
12 PIECES

PLANK SIZE
158×950
mm*

QTTY/BOX
~1.8 m²
12 PIECES

* MINIMUM ORDER QUANTITY 2 PALETTS

OLENA

TYRION

MALISTER

TULLY

STARK

LANNISTER

GENDRY

REED

TARGARYEN

WESTERLING

BRONN

GRABO LVT

100% WATER RESISTANT

ARYA

OBERYN

DAVOS

SANSA

DOREAH

ELERIA

JOFFREY

MARTELL

WALDER

BRANDON

TORMUND

GREYJOY

BARATHEON

MORMONT

DROGO

MARGAERY

ROSLIN

BOLTON

GRABO **LVT**
CONSTRUCTION

- iGuard PUR Protective coating
- Transparent wear layer
- Design printed layer
- Middle layer
- Glass fibre
- Back layer

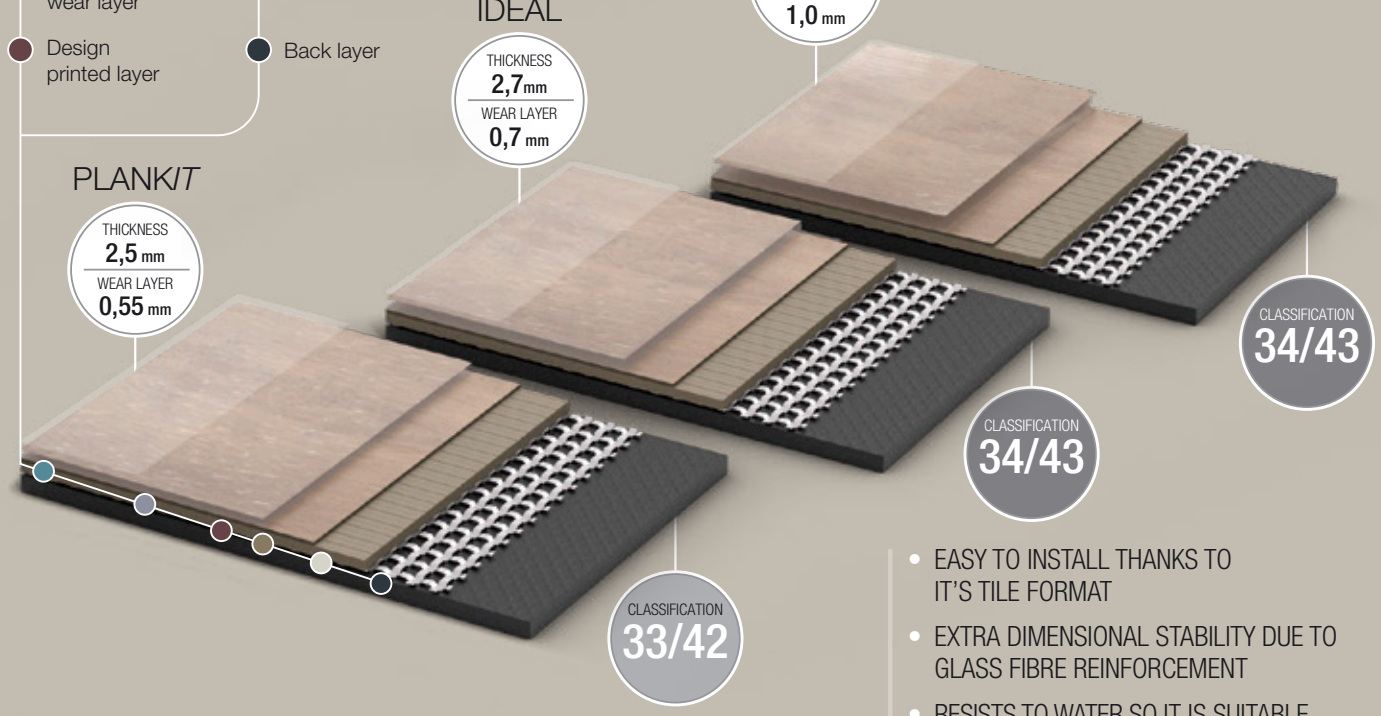

- EASY TO INSTALL THANKS TO IT'S TILE FORMAT
- EXTRA DIMENSIONAL STABILITY DUE TO GLASS FIBRE REINFORCEMENT
- RESISTS TO WATER SO IT IS SUITABLE TO WET ROOMS AS WELL
- OPTIMAL SOLUTION FOR RESIDENTIAL AND COMMERCIAL APPLICATIONS

iGuard · SOLVENT FREE · GLASS FIBRE REINFORCEMENT · NO WAX

STONE
DESIGNS

PLANK SIZE
305×610
mm

QTTY/BOX
~2.2 m²
12 PIECES

EURON

CASSEL

ROYCE

LUWIN

HODOR

PODRICK

MYRCELLA

NYMERIA